

M8

0800F1 ... 3...

Cordsets M8



Actuator/sensor cordset with overmolded connector

Cable end 1:

M8 female, straight, with snap joint, A-coded, IP65

Cable end 2:

blunt cut

Cable:


PUR, black

Approvals:




M8

0800F1 ... 3...

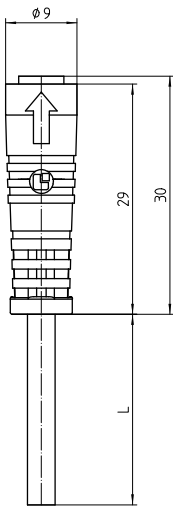

Pin assignments for female M8 connectors, A-coded, front view



Environmental conditions

Temperature range -25 °C/+80 °C

Materials

Insulating body TPU GF, HB according to UL94
 Contact bush CuZn, pre-nickel and gold-plated
 Overmolding/handle TPU¹

¹ material halogen-free

Mechanical data

Mating cycles ≥ 100
 Insertion force ≤ 23 N¹
 Withdrawal force ≤ 23 N¹
 Protection class IP65²

¹ measured with a proper counterpart

² according to IEC DIN EN 60529, only in mated condition with an appropriate counterpart

Connected cable

Outer jacket PUR, black

Electrical data (at T_{amb} 20 °C)

Contact resistance ≤ 10 mΩ
 Rated current 4 A (T_{amb} 40 °C)
 Rated voltage 50 V AC/60 V DC (with pollution degree 3)
 Rated impulse voltage 1,5 kV
 Material group I (IEC)/0 (UL) (CTI = 600)
 Insulation resistance > 100 MΩ

Associated products

Counterparts

- | | | |
|----------------------|----------------------|-------------------------|
| ☞ 0810 ... 0... | ☞ 0810 ... 3... | ☞ 0810 0800 ... 0... |
| ☞ 0810 0800 ... 3... | ☞ 0810 0805 ... 3... | ☞ 0810 0806 ... L1 3... |
| ☞ 0815 ... 0... | ☞ 0815 ... 3... | ☞ 0830 ... T8CW ... |
| ☞ 0831 ... T10CP | ☞ 0831 ... T8CW ... | ☞ 0832 ...S9 T8CP |
| ☞ 6157 8055 S01 4W | ☞ 6157 8055 S03 8W | ☞ 6157 8055 S06 16W |
| ☞ 6157 8055 S09 24W | | |

M8

0800F1 ... 3...

Designation	Pole Number	Connected Cable	PU (Pieces)	MDQ (Pieces)	Dimensions L (mm)
0800F1 03 300 2m	3	PUR, black, 3 x 0.34 mm ² (AWG 22), 910300, UL-style 20549	5	10	2000
0800F1 03 300 5m	3	PUR, black, 3 x 0.34 mm ² (AWG 22), 910300, UL-style 20549	1	10	5000
0800F1 04 301 2m	4	PUR, black, 4 x 0.34 mm ² (AWG 22), 910301, UL-style 20549	5	10	2000
0800F1 04 301 5m	4	PUR, black, 4 x 0.34 mm ² (AWG 22), 910301, UL-style 20549	1	10	5000

Packaging:
in a plastic bag